

HKH8350-T

7" Touch-Screen Indoor Station

EYESONIC™



Key Features

- Premium tempered glass
- Aerospace-grade aluminum
- New UI V2.0 – User-friendly
- Ultra-slim design
- Wi-Fi
- Supports capture while video calling
- TF card, mac 32G
- 8CH alarm input, 2 alarm output, 1x485
- Remote unlocking via the client or the APP
- Views live videos of door stations and external cameras

Model Number

HKH8350-T

Display Parameters

Display Screen	7-inch colour TFT screen
Display Resolution	1024 x 600
Operation Method	Capacitive touch screen

Audio Parameters

Audio Input	Built-in omnidirectional microphone
Audio Output	Built-in loudspeaker
Compression Standard	G.711 U
Compression Rate	64 Kbps
Audio Quality	Noise suppression and echo cancellation

Network Parameters

Wired network	10/100 Mbps self-adaptive
Protocol	TCP/IP, SIP, RTP
Interface	1 RJ-45 10/100 Mbps self-adaptive
Alarm input	8-ch alarm inputs
I/O Output	2
TF Card	Max to 32 G, SD 2.0 or lower version
RS485	Supported


General

Dimension	180 mm × 140 mm × 22.4 mm (7.09" × 5.51" × 0.88")
Weight	600 g (station)
Power Supply	IEEE802.3af, standard PoE 12 VDC/1 A
Power Supply via	12 V, 200 mA
Detector	
Power Consumption	≤ 7 W
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Certification	FCC, IC, CE, C-TICK, ROHS, REACH, WEEE, UL, CB, RCM

www.eyesonic.com

HKH8350-T

7" Touch-Screen Indoor Station

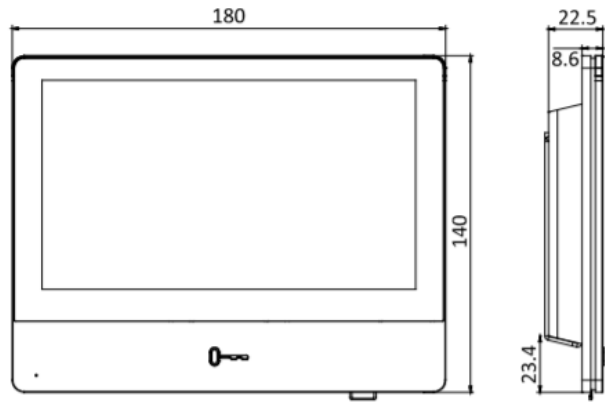

Unit : mm

Appearance and Interfaces

