

ES-3422N

2MP IP Mini Dome, Exterior


EYESONIC™



Key Features

- 2 megapixel (1920 x 1080) High Resolution
- HD 1080p Real-time Video
- True Day / Night Auto Switch
- IP66 & IK10
- IR LEDs up to 100 ft
- Vandal-proof Housing

Dimensions

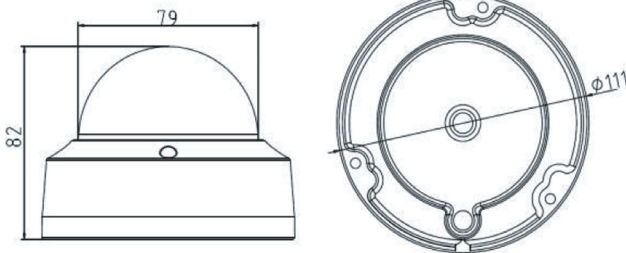

Model Number

ES-3422N

Image Sensor	1/3" progressive scan CMOS
Min. illumination	0.01 lux @ F1.2, AGC ON, 0 lux with IR
Shutter time	1/30s ~ 1/100,000s
Lens	4mm @ F2.0, angle of view 52° (2.8mm optional)
Lens mount	M12
Day & night	ICR
Video compression	H.264 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Dual stream	Yes
Max, image resolution	1920 x 1080
Frame rate	60 Hz 30 fps (1920 x 1080), 30 fps (1280 x 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network storage	NAS
Alarm trigger	motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos
System Compatibility	ONVIF, PSIA, CGI
General functionalities	Flickerless, heartbeat, mirror, user authentication, video mask, watermark
Communication interface	1 RJ45 10M/ 100 M Ethernet interface
Operating conditions	-30 °C ~ 60 °C (-22 °F ~ 140 °F) humidity 90% or less (non-condensing)
Power supply	12 VDC +/- 10%, PoE (802.3af)
Power consumption	7W Max.
Impact protection	IK10
IR range	approx 100 ft
Dimensions	Ø 140 x 92mm (4.4" x 3.2")
Weight	600g (1.32lbs)