

HAC346-FD/F


5MP DarkGuard Fixed Turret Camera

EYESONIC™



Key Features

- 5 MP, 2560 × 1944 resolution
- 24-hour color image
- 2.8 mm, 4 mm fixed focal lens
- Smart Light, up to 20 m white light distance
- 130 dB true WDR, 3D DNR
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67

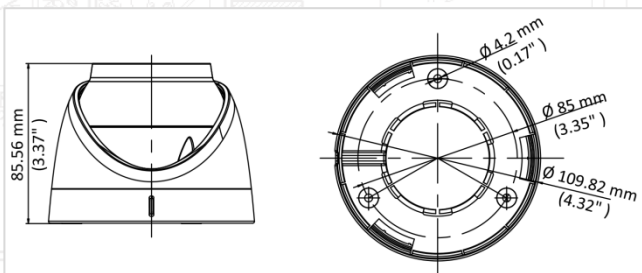

Model Number

HAC346-FD/F

Camera

Image Sensor	5 MP progressive scan CMOS
Min. Illumination	Color: 0.0005 Lux @ (F1.0, AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/25 s to 1/50, 000 s, NTSC: 1/30 s to 1/50, 000 s
Slow Shutter	Max. 16x
Day & Night	Colour
Strobe Light Alarm	Yes
Digital Noise Reduction	3D DNR
WDR	130 dB
Angle Adjustment	Pan: 0° to 360°; Tilt: 0° to 75°; Rotate: 0° to 360°

Lens

Focal Length	2.8mm, 4mm fixed lens
Horizontal Field of View	109°(2.8 mm), 67° (4 mm)
Lens Mount	M16

Image

Resolution	2560 (H) × 1944 (V)
Frame Rate	TVI: 5MP@20fps, 4MP@30fps, 4MP@25fps, 1080p@30fps, 1080p@25fps CVI: 4MP@30fps, 4MP@25fps AHD: 5MP@20fps, 4MP@30fps, 4MP@25fps CVBS: PAL/NTSC

Menu

White Light	Auto/off
Image Mode	STD/HIGH SAT
White Balance	Auto/Manual
Day/Night Mode	Colour
Privacy Mask	4 programmable privacy masks
Motion Detection	4 programmable areas
Auto Exposure Mode	WDR/BLC/HLC/Global/HLS/Anti-Banding
AGC	Yes
Noise Reduction	3D DNR
Language	English
Functions	Brightness, Sharpness, Mirror, Smart light

Interface

Video Output	Switchable TVI/AHD/CVI/CVBS
--------------	-----------------------------

General

Operating Condition	-40 °C to 60 °C (-40 °F to 140 °F), humidity: 90% or less (non-condensation)
Power Supply	12 VDC ±25%
Power Consumption	Max. 3.5 W
Protection Level	IP67
Material	Main Body: Metal, Enclosure: Plastic
Communication	Up the coax
Dimensions	Ø 109.82 mm × 85.56 mm (Ø 4.32" × 3.37")
Weight	Approx. 350 g (0.77 lb.)

www.eyesonic.com